

UNLESS OTHERWISE NOTED:
1. ALL RESISTORS ARE 1/4W 5%, RATED IN OHMS.
2. ALL CAPACITORS ARE IN MICROFARADS, NON-POLAR.
3. ALL DIODES ARE 1N4001 A.

offset-Balance

0 volts DC
± 50mV at
SPKR JACK

BIAS

7mV
ACROSS
33 Ω
Emitter
Resistor

FAN/TRAC


6ESC143D
8A 400V
22-84000

SPKR TRIAC

MAC 2236
22-84100
25A 400V

SPKR TRIAC
-GATED

MBS4991
SBS4991
2N4991
22-49910

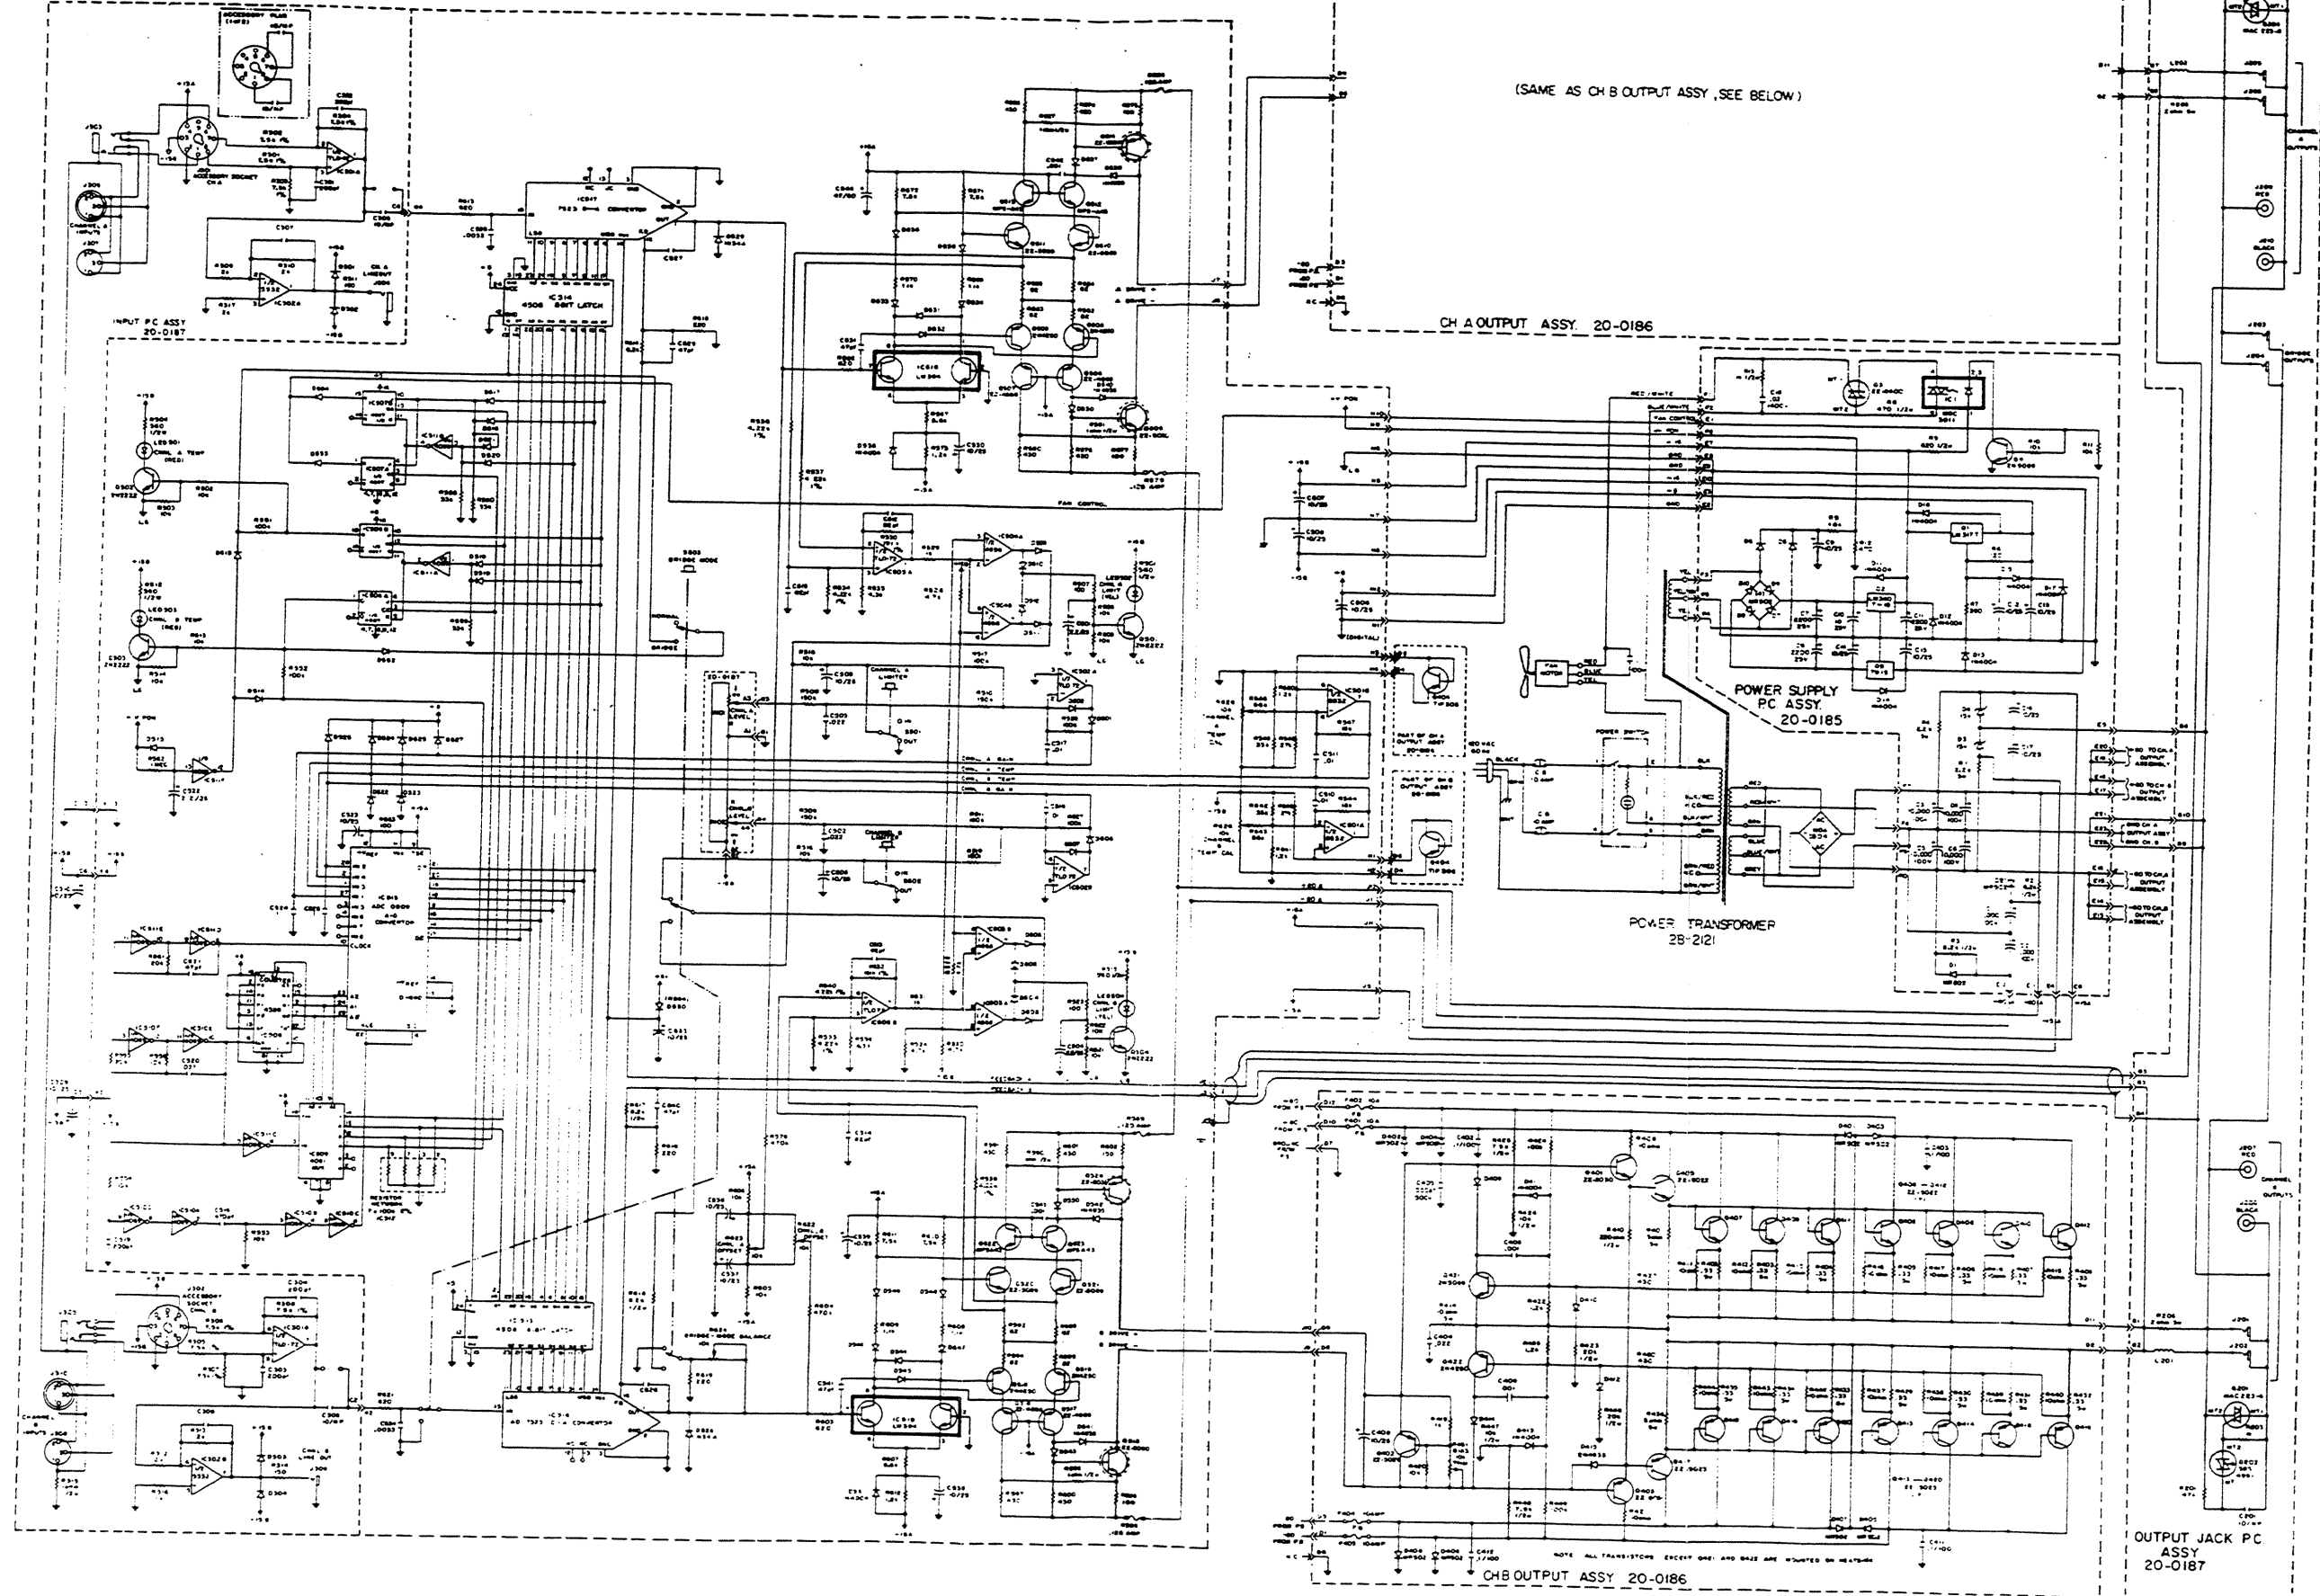

SPL 6800 SCHEMATIC